


EUROGRAB SH350

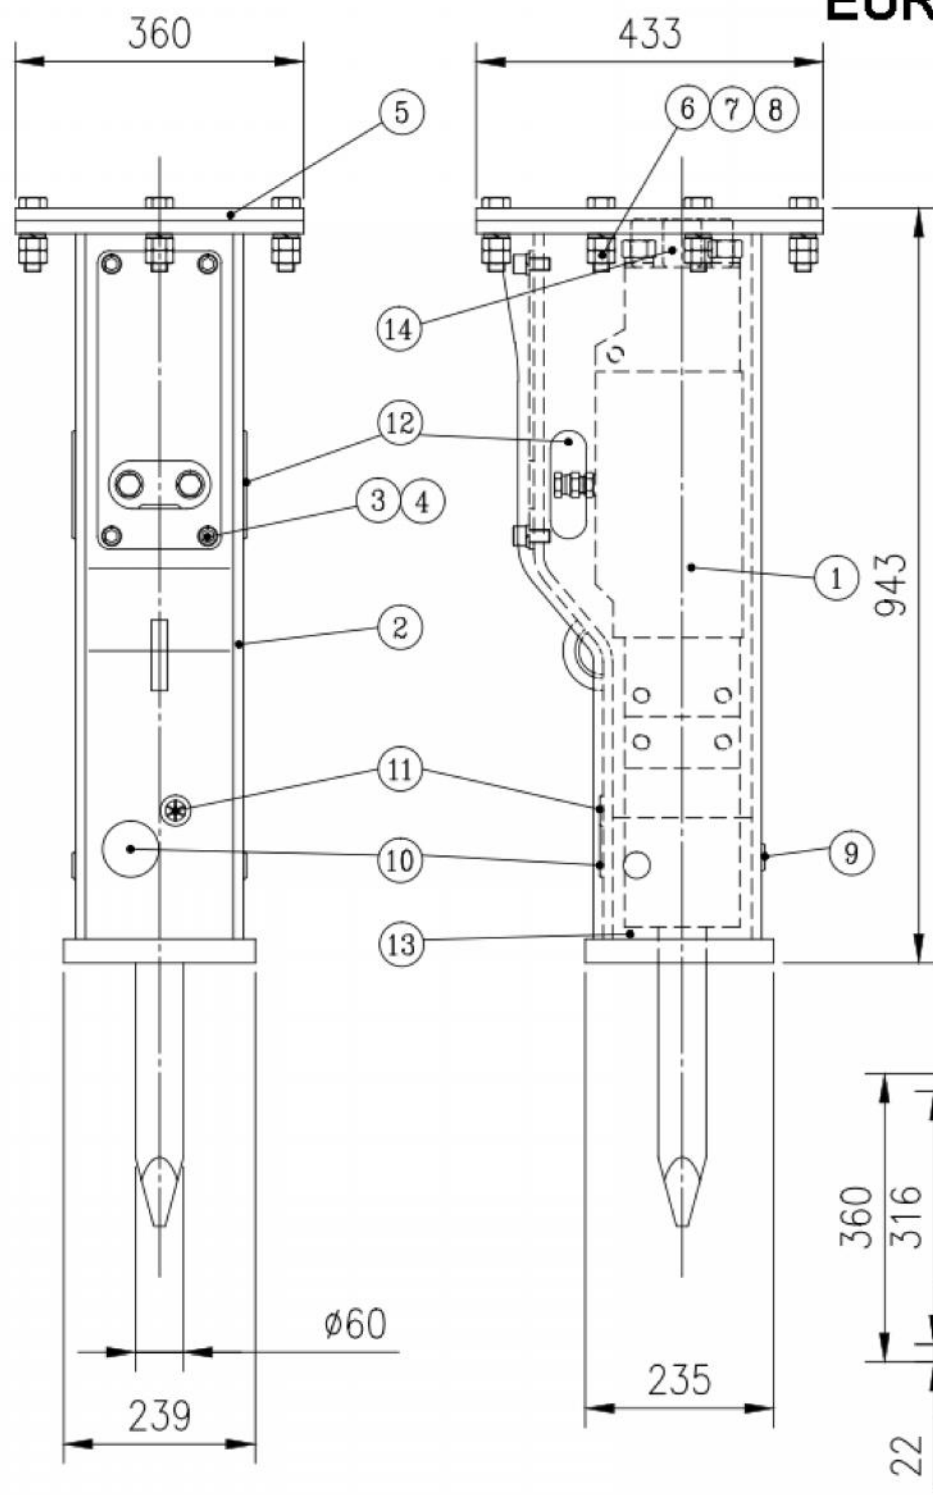

Technical Specification		
Suitable Excavator	ton	3.0~5.5
	lb	6722~12125
Operating Weight Box Type	kg	247
	lb	543
Required Oil Flow	l/min	30~60
	gal/min	7.9~16.0
Setting Pressure	bar	150
	psi	2134
Operating Pressure	bar	100~130
	psi	1422~1849
Impact Rate	bpm	500~1000
Hose Diameter	inch	1/2
Tool Diameter	mm	60
	inch	2.4

Tightening Torque & Gas Pressure		
through bolt nut	kg.m	25~30 30~35
Acc body Socket bolt	kg.m	-
Acc cover Socket bolt	kg.m	-
Accumulator cap & plug	kg.m	-
Side bolt	kg.m	80
Back head gas pressure	kg/cm ²	16.5
	psi	235
accumulator gas pressure	kg/cm ²	-
	psi	-

Part No	도번 Dwg' No	품명 Description	재료 Mat'l	수량 Qty	규격 Spec & Size	비고 Remark
14	SB30/35	UPPER DAMPER		1		
13	SB30	LOWER DAMPER		1		
12	PL12535	ADAPTER PLUG		2		
11	PL3012X	GREASE PLUG		1		
10	PL6015	TOOL PIN PLUG		1		
9	PL2510	STOP PIN PLUG		3		
8	HN2025	HEX.NUT		20		
7	SW20	SPRING WASHER		10		
6	HB202580	HEX.BOLT		10		
5	350M-6103	UPPER PLATE		1		
4	SW16	SPRING WASHER		4		
3	WB162030	WRENCH BOLT		4		
2	350M-6101	FRAME		1		
1	350M-1100	MAIN BODY ASS'Y		1		

기종 (MODEL)	도명 Dwg. NAME	BOX BRACKET ASS'Y	척도 SCALE
350M			1:6
			중량 W.T.(kg)

WWW.EUROGRAB.NL
INFO@EUROGRAB.NL