


# EUROGRAB SH400

기호 No	년월일 Date	변경내용 Description of Revision	설계 Dsgn	검토 Chkd	승인 Appd
-------	----------	------------------------------	---------	---------	---------

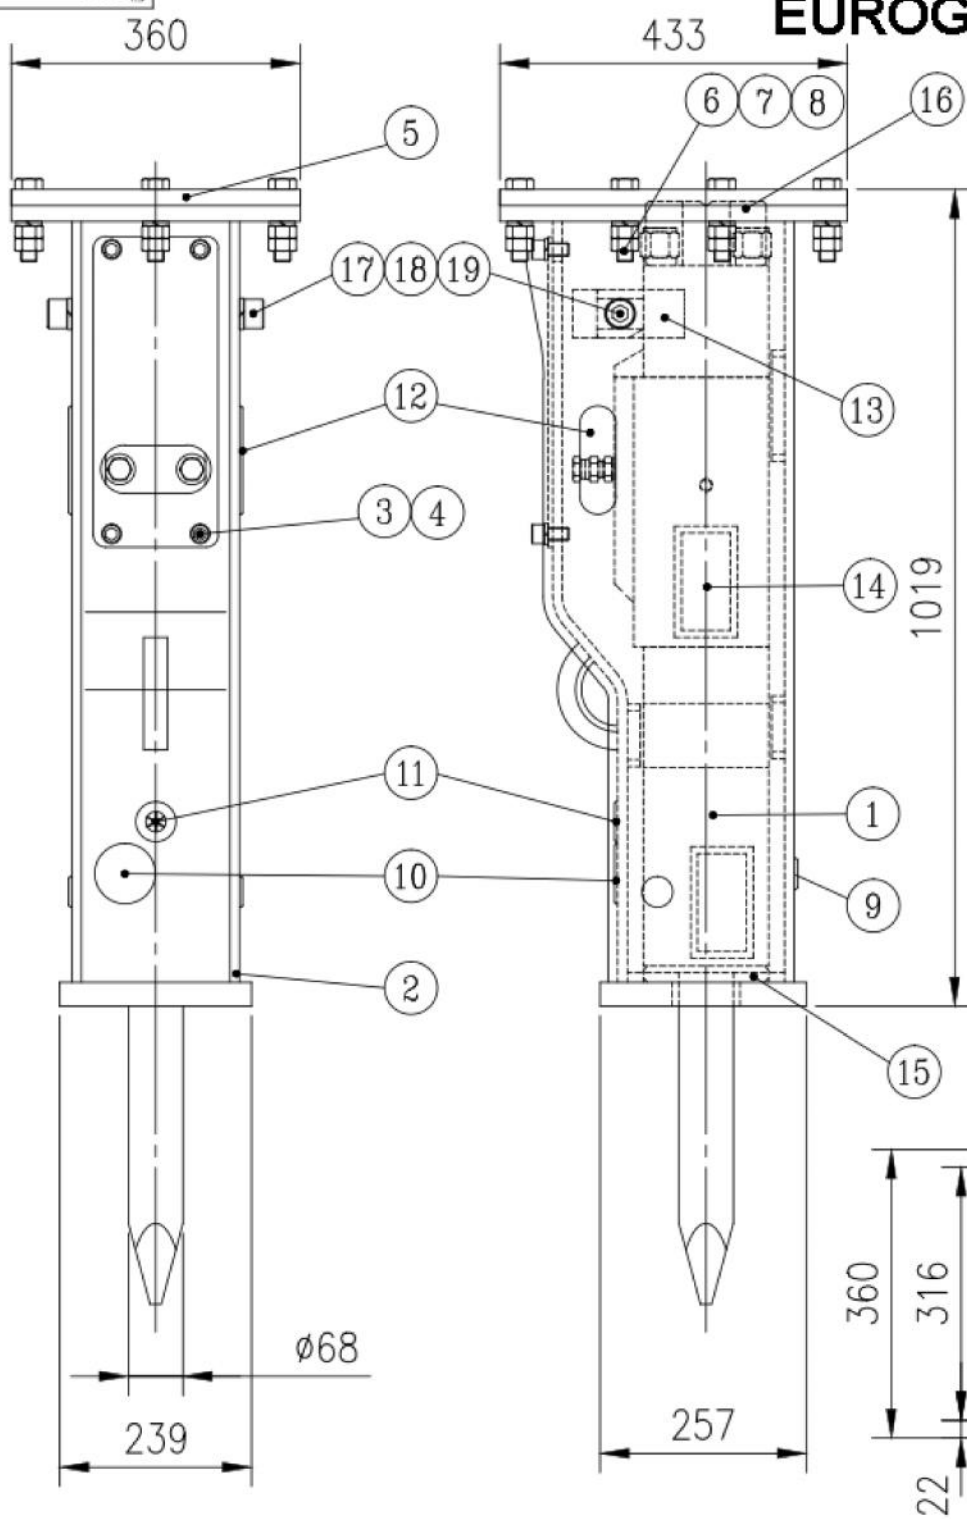

Suitable Excavator	ton	4~7
	lb	8962~15432
Operating Weight Box Type	kg	325
	lb	715
Required Oil Flow	l/min	40~70
	gal/min	10.6~18.5
Setting Pressure	bar	170
	psi	2418
Operating Pressure	bar	110~140
	psi	1565~1991
Impact Rate	bpm	500~900
Hose Diameter	inch	1/2
	mm	68
Tool Diameter	mm	68
	inch	2.7

through bolt nut	kg.m	38~42 60~70
Acc body Socket bolt	kg.m	-
Acc cover Socket bolt	kg.m	-
Accumulator cap & plug	kg.m	-
Side bolt	kg.m	100
Back head gas pressure	kg/cm <sup>2</sup>	16.5
	psi	235
accumulator gas pressure	kg/cm <sup>2</sup>	-
	psi	-

19	HN2430	SIDE HEX NUT		2		
18	SW24	SIED SPRING WASHER		2		
17	WB24.3085	SIED WRENCH BOLT		2		
16	BK-40	UPPER DAMPER		1		
15	400M-6106	LOWER DAMPER		1		
14	400M-6108	SIDE DAMPER		7		
13	400M-6102	GUIDE PLATE		2		
12	PL12535	ADAPTER PLUG		2		
11	PL4017X	GREASE PLUG		1		
10	PL6013	TOOL PIN PLUG		1		
9	PL3012	STOP PIN PLUG		3		
8	HN2025	HEX.NUT		20		
7	SW20	SPRING WASHER		10		
6	HB202580	HEX.BOLT		10		
5	400M-6103	UPPER PLATE		1		
4	SW16	SPRING WASHER		4		
3	WB1620.30	WRENCH BOLT		4		
2	400M-6101	FRAME		1		
1	400M-1100	MAIN BODY ASS'Y		1		

기호 (MODEL)	도명 (DWG. NAME)	재료 (Mat)	수량 (Q'ty)	규격 (Spec & Size)	비고 (Remark)
400M	BOX BRACKET ASS'Y				최대 SCALE 1:8 중량 W.T.(kg)

[WWW.EUROGRAB.NL](http://WWW.EUROGRAB.NL)  
[INFO@EUROGRAB.NL](mailto:INFO@EUROGRAB.NL)