


EUROGRAB SH430

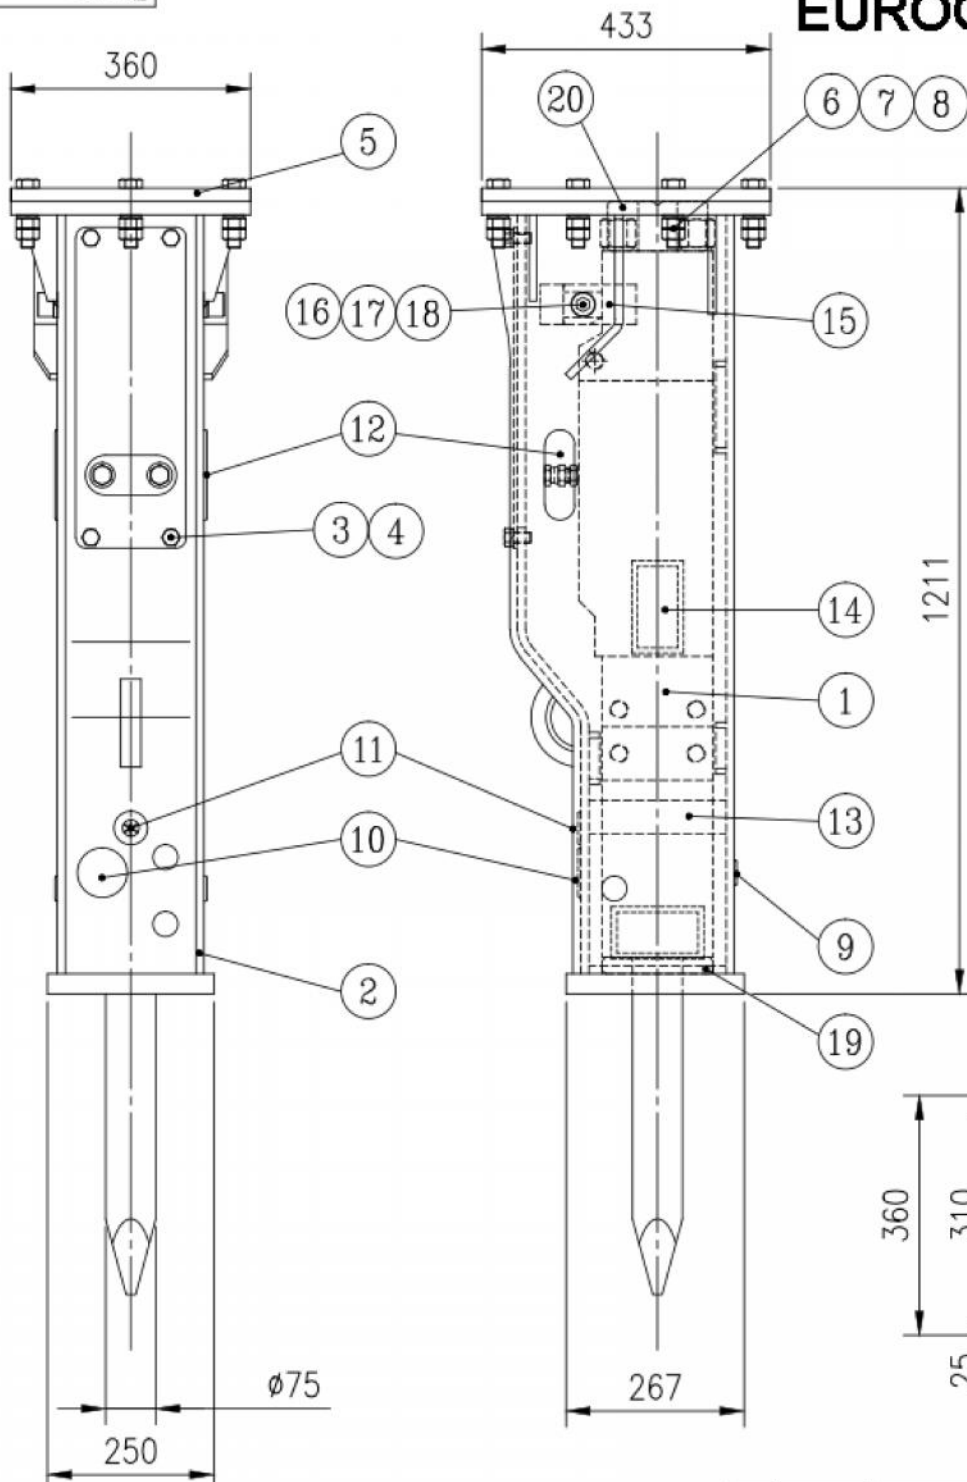

Technical Specification		
Suitable Excavator	ton	6~9
	lb	13228~19841
Operating Weight Box Type	kg	413
	lb	909
Required Oil Flow	l/min	50~90
	gal/min	13.2~23.8
Setting Pressure	bar	180
	psi	2560
Operating Pressure	bar	120~150
	psi	1707~2134
Impact Rate	bpm	400~800
Hose Diameter	inch	1/2
Tool Diameter	mm	75
	inch	3.0

Tightening Torque & Gas Pressure		
through bolt nut	kg.m	38~42 60~70
Acc body Socket bolt	kg.m	-
Acc cover Socket bolt	kg.m	-
Accumulator cap & plug	kg.m	-
Side bolt	kg.m	100
Back head gas pressure	kg/cm ²	16.5
	psi	235
accumulator gas pressure	kg/cm ²	-
	psi	-

18	HN2430	SIDE HEX NUT	2		
17	SW24	SPRING WASHER	2		
16	WB243085	SIDE WRENCH BOLT	2		
15	400M-6102	GUIDE PLATE-1	2		
14	400M-6108	SIDE DAMPER	7		
13	430M-6102	GUIDE PLATE	2		
12	PL12535	ADAPTER PLUG	2		
11	PL4017X	GREASE PLUG	1		
10	PL6013	TOOL PIN PLUG	1		
9	PL3012	STOP PIN PLUG	7		
8	HN2025	HEX.NUT	20		
7	SW20	SPRING WASHER	10		
6	HB202590	HEX.BOLT	10		
5	430M-6103	UPPER PLATE	1		
4	SW16	SPRING WASHER	4		
3	WB162030	WRENCH BOLT	4		
2	430M-6101	FRAME	1		
1	430M-1100	MAIN BODY ASS'Y	1		

Part No	도번 Dwg' No	품명 Description	재료 Mat'l	수량 Qty	규격 Spec & Size	비고 Remark
기종(MODEL)		도명 DWG. NAME	BOX BRACKET ASS'Y		최대 SCALE 1:8	
430M				중량 W.T.(kg)		

20	BK40	UPPER DAMPER	1		
19	430M-6106	LOWER DAMPER	1		

WWW.EUROGRAB.NL
INFO@EUROGRAB.NL
